

# Terminator™ / FAK Connection Kits

for TubeTrace® Electrically Heated Tubing

## Product Specifications

Terminator kits are approved for use in ordinary (nonclassified) areas and hazardous (classified) areas. The Terminator kits have a maximum exposure temperature rating of 482°F (250°C) with a minimum installation temperature of -76°F (-60°C). The molded FAK kits have a maximum temperature rating of 180°F (82°C) with a minimum installation temperature of -4°F (-20°C).

The following Terminator Kits can be used with the molded FAK Kits shown below. These combination kits must be ordered together!

### Terminator / FAK Combination Connection Kits<sup>1</sup> . . .



**DP/FAK and ZP/FAK Power Connection/Splice Kits** are designed to fabricate power connections, in-line/T-splice connections or for making end terminations on TubeTrace with electric heat tracing. (PETK/SCTK termination kit required, order separately).



**Surface Mounted Bulkhead Entry Kit** is designed to provide an effective transition when TubeTrace must pass through an enclosure or shelter wall.

**FAK-1**  
(fits O.D. 1-1/8" to 2-1/2" bundles)



**DS/DE/FAK and ZS/ZE/FAK In-Line Splice/End Kits** are designed to fabricate accessible outside-the-insulation in-line splices or end terminations on TubeTrace with electric heat tracing. (SCTK termination kit required, order separately).



**90° Large Elbow Transition Kit** is designed to make a water-proof seal over TubeTrace elbow splices.

**FAK-2L**  
(fits O.D. 1-7/8" to 3-1/2" bundles)



**DL/FAK and ZL/FAK Indicating Light Kits** are designed to provide visual indication of an energized heating circuit. The kit may be utilized as a power connection or an end termination kit. (PETK/SCTK termination kit required, order separately).



**In-Line Splice Kit** is designed to make a weather proof seal over TubeTrace in-line splices.

**FAK-4**  
(fits O.D. 1-1/8" to 2-1/2" bundles)

**FAK-4L**  
(fits O.D. 1-7/8" to 3-1/2" bundles)



#### Order Separately

**PETK** circuit fabrication kit includes a power boot, end cap, RTV adhesive.

**SCTK** splice connection/termination kit includes a power boot, wire nuts, RTV adhesive.



**Tee Splice Kit** is designed to make a waterproof seal over TubeTrace Tee splices.


**FAK-5**  
(fits O.D. 1-1/8" to 2-1/2" bundles)

**FAK-5L**  
(fits O.D. 1-7/8" to 3-1/2" bundles)

#### Note . . .

1. Stand alone FAK Kits are also available for mounting thermostats and temperature sensors or for unheated ThermoTube® and SafeTrace® bundles.
2. Terminator and FAK combination kits must be ordered together.

### Product Reference Legend<sup>2</sup> . . .

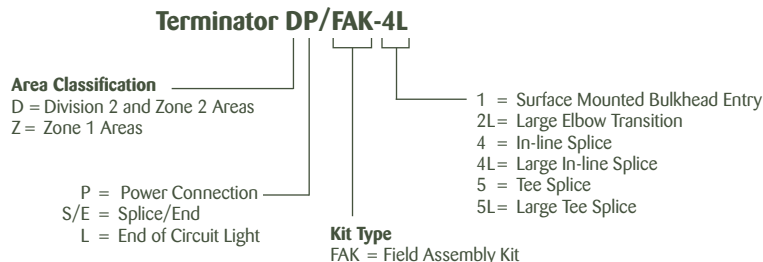

Terminator DP/FAK-4 (shown)



100 Thermon Dr. • PO Box 609 • San Marcos, TX 78667-0609  
Phone: 512-396-5801 • Facsimile: 512-396-3627 • **800-820-4328**  
www.thermon.com In Canada call **800-563-8461**

Form CLX0056-0409 © Thermon Manufacturing Co. Printed in U.S.A.